



(12) APPLICATION

(11) **20180900**

(13) **A1**

NORWAY

(19) NO

(51) Int Cl.

E21B 34/06 (2006.01)

E21B 34/10 (2006.01)


E21B 34/14 (2006.01)

Norwegian Industrial Property Office

(21)	Application nr	20180900	(86)	Int. application day and application nr
(22)	Application day	2018.06.26	(85)	Entry into national phase
(24)	Date from which the industrial right has effect	2018.06.26	(30)	Priority
(41)	Available to the public	2019.12.27		
(71)	Applicant	SBS Technology AS, Storaneset 12, 5260 INDRE ARNA, Norge		
(72)	Inventor	Jan Tore Tveranger, Garnestona 2, 5264 GARNES, Norge		
(74)	Agent or Attorney	ACAPO AS, Postboks 1880 Nordnes, 5817 BERGEN, Norge		

(54)	Title	Packer Setting Device - mill open shatter ball seat / Well completion method		
(57)	Abstract			

A method for completion of an oil or gas well with production tubing (14), a well tool obturator and a well tool device (1) comprising an first pipe part (20) and a second pipe part (22) each having a first end (20a, 22a), and a second end (20b, 22b) with a through channel (30).

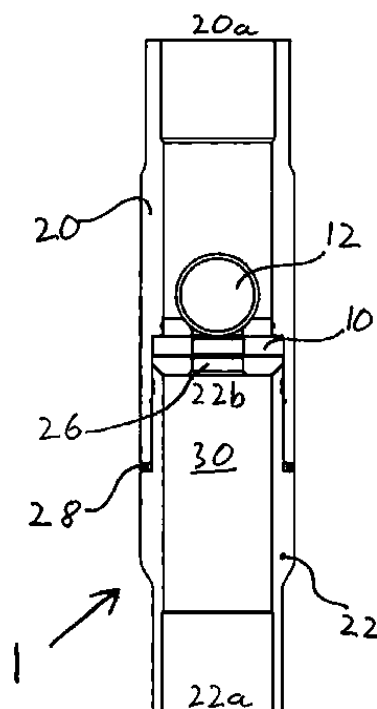

TITLE: Packer Setting Device - mill open shatter ball seat / Well completion method

5

Field of the invention

The present invention relates to a method for completion of an oil or gas well with production tubing. The intervention also relates to a well tool device comprising a first pipe part and a second pipe part each having a first end, and a second end with a through channel. Further the invention also relates to a well tool obturator.

10

Background of the invention.

When installing production tubing in a well, it is preferred to run in the tubing with an open end to allow fluid circulation through the tubing end. After tubing is installed, it is preferred to be able to close the end to be able to perform a pressure test to prove well integrity, and to pressurize the tubing to activate the production packer that seals the annulus between tubing and casing. After these operations, it is preferred to leave the tubing with a full inner diameter, both for producing the well with as large inner diameter as possible, and to have access for doing interventions in the well below the tubing end. There are mainly three reasons for using the open tubing end method;

15

20

To allow the tubing to be automatically filled with the fluid that is already present in the pre-installed casing. Current solution involves tubing installed with closed end, meaning that tubing must be manually filled from surface, and that the displaced volume in casing must be pumped out. This is time consuming and a costly operation.

25

If there is a well control situation during tubing installation, there is a possibility to kill the well by pumping in heavy fluid in the well to achieve hydraulic overbalance to control the situation. With closed end or with a restricted circulation point, this can be challenging.

30

Be able to displace fluid in both tubing and annulus post tubing installation. This is to change the specific gravity to manipulate the hydrostatic pressure at depth. This can be both for well control, and for well start up.

35

Disclosure of the state of art.

Ball seats are commonly used in downhole intervention and completion industry. An obturator such as a ball, dart or other activation device is normally used to activate a tool, or to block a fluid flow.

One prior solution is to run the tubing in the well with closed end. This requires a plug in the tubing end, which must be removed after tubing test and packer setting. This is costly and includes significant technical and operational risk. This method also calls for filling of tubing and draining of casing as the tubing is inserted in to the well.

Another prior solution involves mill out of metallic ball seats. Milling out a metallic seat will limit the tubing inner diameter post milling to the outer diameter of the mill bit used for milling. Since the mill will have to have a somewhat smaller diameter than the inner diameter of the tubing, a restriction will be left in the tubing where the seat used to be.

Yet another prior solution involves ball seats made from dissolvable/degradable materials. This requires a certain fluid and temperature present in the well, and it will also take some time to dissolve the seat.

Further another prior solution are collets used as ball seats. This has limitations to how much the inner diameter can change when manipulating the collet, hence it will often leave a restriction in the well, and it is also difficult to obtain a hydraulic seal in a collet.

Objects of the present invention

One object of the present invention is to find a method and a device for completing a well which reduces operational risk and cost and at the same time leaves no restrictions in the tubing after completion.

Another object of the invention is to find a method for auto filling tubing during installation, setting production packer and obtaining full tubing inner diameter post operation.

Yet another object of the invention is to find a method and a device that allows for circulation during running tubing in the well and allows for setting a packer and pressure testing the tubing without leaving any restrictions in the tubing and without any additional runs in the well.

5

Further another object of the invention is to find an obturator that can damp the impact as the obturator hits the obturator seat.

10

Further another object of the invention is to find an obturator that produce a better seal with an obturator seat.

Summary of the invention

Said objects are achieved with a method for completion of an oil or gas well with production tubing characterized in that the method comprises the following steps:

15

a) running in a tubing string open ended with a preinstalled obturator seat made of brittle material;

b) dropping an obturator in the tubing;

c) land the obturator in the obturator seat;

20

d) pressurizing the tubing above the obturator seat, and perform tests and/or operation demanding increased pressure;

e) release the pressure;

f) run in hole with a crushing means;

g) shatter the obturator seat by using mechanical force applied by said crushing means.

25

The method, wherein step b) can include dropping an obturator with an elastomer coating.

30

The method, wherein step b) can include dropping an obturator that is fully or partly dissolvable in well fluid.

The method, wherein step d) can include setting a packer between the tubing and the casing.

35

The method, wherein step d) can include performing a pressure test of the tubing.

The method, wherein step a) can include installing a well tool device containing an obturator seat made up of brittle and tempered glass.

5 The method, wherein step g) can include shattering the obturator by using mechanical force applied by said crushing means.

The method, wherein step g) can include shattering the obturator seat with a milling tool.

10 The method, wherein step g) can include milling the obturator prior to milling the obturator seat.

15 Said objects are achieved using a well tool device comprising an first pipe part and a second pipe part each having a first end, and a second end with a through channel, said well tool device characterized in that a groove is provided in an interface in the through channel between the first pipe part and the second pipe part, said groove is accommodating a breakable obturator seat.

20 The well tool device, wherein the obturator seat can be made up of strengthened glass.

The well tool device, wherein the obturator seat can be made up of brittle and tempered glass.

25 The well tool device, wherein the obturator seat can be made up of several pieces of glass.

The well tool device can comprises a spring below the obturator seat.

30 The well tool device can comprises a mechanical spring below the obturator seat.

The well tool device can comprises a hydraulic spring below the obturator seat.

35 Said objects are achieved using a well tool obturator, characterized in that the obturator is covered with an elastomer coating.

The obturator can be made of a material that is fully or partly dissolvable in well fluid.

Description of the diagrams

Embodiments of the present invention will now be described, by way of example only, with reference to the following diagrams wherein:

5

Figure 1 shows a tubing being run into a well inside a casing.

Figure 2 shows the tubing at the desired depth inside the casing, with a drop ball traveling in the well fluid towards the ball seat.

10

Figure 3 shows the tubing inside the casing with the drop ball placed in the ball seat sealing of the tubing.

Figure 4 shows the previously described well construction with the ball after it have fallen through the ball seat because it has started to dissolve.

15

Figure 5 shows a milling tool conveyed into the tubing to shatter the ball seat.

Figure 6 shows the tubing installed inside the casing with a set packer.

20

Figure 7 shows one preferred embodiment of the well tool device as it will be run in hole.

Figure 8 shows one preferred embodiment of the well tool device after the drop ball has landed in the ball seat.

25

Figure 9 shows one preferred embodiment of the well tool device after the ball seat is shattered.

Figure 10 shows one preferred embodiment of the well tool device which includes a damping mechanism.

30

Figure 11 shows one preferred embodiment of the well tool device which includes another damping mechanism.

35

Figure 12 shows one preferred embodiment of the drop ball.

Description of preferred embodiments of the invention

The invention relates to a method and a device to be used in the completion of an oil or gas well. In the following preferred embodiments of the invention will be disclosed. The different embodiments can be combined with each other and shall not be seen upon as limiting to the scope of the protection which is defined by the claims. The wide range of possible embodiments and combination of embodiments comes as a result of the need to adapt the method, system and device to the condition under where they are to be used.

10 The term obturator seat is used as a general term to describe a ball seat or a seat that is made to accommodate some other type of obturator such as a dart for instance. Here after in the description ball seat is used according to the embodiments in the figures. In the claims the broader term obturator seat is used. The same applies for the terms obturator and ball.

15 As seen in Figure 1 a production tubing 14 is run into the well inside a casing 16. The tubing 14 has a preinstalled packer device 18 and a preinstalled ball seat 10 close to the open end of the tubing 14. The ball seat 10 is made of a breakable and brittle material for instance glass. Strengthened glass such as for instance brittle and
20 / or tempered glass will be suitable for the application. The glass can be made up of of several pieces for instance several layers of glass to increase strength. The ball seat 10 or crushable shoulder is donut shaped, and mounted as part of a well tool device 1. The well tool device 1 is mounted in the tubing string 14 with connections that is compatible to the tubing connections. During the run in hole well fluid can be
25 pumped down the tubing 14 out the open end and up the annulus between the tubing 14 and the casing 16 as indicated by the arrows in Figure 1 and 2. The circulation of the well fluid is done by using the rigs circulation system which is not displayed in the Figures.

30 In Figure 2 the production tubing 14 has reached the desired depth and a ball 12 or some other type of obturator for instance a dart is dropped into the tubing 14 and if necessary pumped down. Before dropping the ball 12, the tubing 14 and the annulus between the tubing 14 and the casing 16 can be displaced to the preferred fluid.

35 In Figure 3 the drop ball has landed in the ball seat 10 sealing off the channel 26 through the ball seat 10 and pressure is applied from the surface in addition to the hydrostatic pressure, increasing the pressure inside the tubing 14 above the ball seat

10. Increasing the pressure to a predetermined value will set the packer device 18 so it seals between the tubing 14 and the casing 16. A pressure test of the tubing 14 which often is a requirement for well integrity purposes can be preformed at this stage. In this embodiment of the invention the ball seat 10 need to be installed below the packer device 18 (as seen in Figure 1-5) both because the applied pressure from above need to act on the packer device 18 to set it and to be able to pressure test the needed section of the tubing 14.

In Figure 4 one possible embodiment of the method is displayed as the ball 12 which is made of dissolvable material have dissolved enough to fall through the seat 10 and leaving a free passage trough the channel 26 in the ball seat 10. For some application the use of a dissolvable ball 12 is not necessary or for other reasons not desirable and then a suitable non dissolvable ball can be used.

As seen in Figure 5, at a suitable time after the installation of the tubing 14 a crushing means such as a milling tool 32 can be conveyed into the well by means of tractor, wireline, slickline, braidedline, coiled tubing or on pipe 34 to break the ball seat 10. Because of the brittle nature of the ball seat 10, full bore will be regained as the ball seat will shatter completely unlike a conventional ball seat in a different material that will have to be milled out with a mill with an OD smaller than the ID of the tubing 14, leaving a restriction in the tubing 14. In case a non dissolvable ball 10 is used the drop ball 10 needs to be milled out, removed, shattered or in other ways cleared from the wellpath to reach the ball seat 10.

Figure 6 shows the tubing 14 installed inside the casing 16 with a set packer 18 sealing of the annulus between the casing 16 and the tubing 14. The ball seat 10 is shattered and removed leaving the tubing 14 without restrictions.

The housing 20, 22, the ball seat 10 and the ball 12 can be seen upon as a system to be used in an oil or gas well to seal of a tubular and if needed later regain fluid flow and a full bore. The system comprises a ball seat 10 and a drop ball 12, and a housing 20, 22 to accommodate the ball seat 10. These three components is the main components that makes up the system in this embodiment, but each of the main components contains sub components where some of them are displayed in the drawings and some is mention throughout the written description.

The housing 20, 22 is in one embodiment of the invention made up of two pipe parts 20 and 22 which can be joined to make up one housing 20, 22. The first end 20a of the housing 20, 22 can be made up with a tubing collar that is compatible with the pin end of the tubing that is to be used in the well in question. Likewise the bottom
 5 end 22a should be compatible with the box end of the tubing to be used in the well. Just as the first 20a and the second end 22 a can be adapted to be used above and below a tubing joint it can just as well be adapted to be used above and/or below any other tubular that is part of the completion or tubing string 14. As part of the run in hole with tubing operation the well tool device 1 will be taken in on the drillfloor with
 10 care manually or mechanically and made up to the tubular in the rotary.

As apparent from the Figures 7 - 9, the present invention also relates to a well tool device 1 comprising a first pipe part 20 and a second pipe part 22, each with a first end 20a / 22a and a second end 20b / 22b. The first end 20a/22a of the first 20 and the second tubular part 22 is adapted to be connected to respectively the pin and the
 15 box end of the particular tubing 14 to be used in the well in question. Further the second end 20b/22b of the first and second tubing part is adapted to be fitted together and when fitted together to create a radial groove 24 inside the through channel 30 suitable for accommodating a ball seat 10. In the radial groove 24 there is
 20 mounted a ball seat 10, with an axial channel 26. The ball seat 10 is shaped to accommodate a drop ball 12, and to seal around the drop ball 12.

Figure 7 shows the mode of the well tool device as it is run in hole, the ball seat is seen mounted in the groove 24 made up by the first pipe part 20 and the second pipe
 25 part 22, and the channel 26 through the ball seat 12 is open for circulation. The joining of the first pipe part 20 and the second pipe part 22 can be done by interference fit, a treaded connection or any other connection that is suitable for the particular application or well conditions. Seal between the first pipe part 20 and the second pipe part 22 can be achieved with a metal to metal seal or by the use of one
 30 or more gaskets 28. In one embodiment a ring can be placed below the seat to act as mechanical insulation between a ball seat that can be made of glass and a housing that can be made of metal. The purpose of such a ring is to avoid unintentional shattering of the ball seat.

35 Figure 8 shows the mode of the well tool device 1 as the tubing 14 has reached the desired depth and the ball 12 has landed in the seat 10, and is forming a seal blocking the through channel 26.

Figure 9 shows the mode of the well tool device 1 after the ball seat 10 is shattered. Because of the brittle nature of the ball seat 10 it shatters completely and leaves the well tool device 1 without restrictions. Preferably the minimal inner diameter of the well tool device 1 corresponds to the inner diameter of the tubing 14. The well is now ready for further interventions below the well tool device 1 or for production without the restriction of the ball seat 10.

Figure 12 shows one preferred embodiment of the drop ball 12 in sectional view. The ball 12 comprises an outer coating 12a made up of elastomeric coating such as for instance rubber coating, and a core 12b that can be made up of metal, plastic, polymers or a combination of said materials. The elastomer coating serves as damping as the ball 12 hits the brittle ball seat 10 and helps achieving a seal between the ball seat 10 and the ball 12. In some possible embodiments of the invention the ball 12 can be fully or partly dissolvable, including the elastomer coating 12a. By using a dissolvable ball one can wait for a pre estimated time and the ball 12 will dissolve sufficiently to fall through the ball seat 10 and allow for circulation through the through channel 26.

In one embodiment of the invention a dart or some other object different from a drop ball 12 can be used to block and seal off the channel 26 through the ball seat 10 or crushable shoulder.

In some possible embodiments of the invention as seen in Figure 10 and 11 the well tool device 1 comprises a cushioning mechanism for damping the impact as the ball 12 hits the ball seat 10. When ball 12 lands, there can be a significant impact, depending on the momentum of the ball 12, which again depends on the combination of mass and velocity. To avoid damage to the ball seat 10 when the ball 12 impacts, the ball 10 can as mentioned be coated with an elastomer material.

Another way or a complementary way is to dampen the drop balls 12 impact is to implement a dampening system adjacent the ball seat 10. As seen in Figure 10 this can be done by a spring on the low side of the ball seat 10. This will function like a cushion under the ball seat 10. The spring can be a mechanical spring 36 such as a Belleville spring, or a hydraulic spring 38.

In one possible embodiment seen in Figure 11 the hydraulic dampening mechanism can be in the form of an annular shaped chamber 38 below the ball seat 10. The

annular chamber 38 makes up a closed volume and is filled with a compressible fluid such as for example silicon oil.

Claims

1. A method for completion of an oil or gas well with production tubing (14) characterized in that the method comprises the following steps:
 - 5 a) running in a tubing string (14) open ended with a preinstalled obturator seat (10) made of brittle material;
 - b) dropping an obturator (12) in the tubing (14);
 - c) land the obturator (12) in the obturator seat (10);
 - d) pressurizing the tubing (14) above the obturator seat (10), and perform
 - 10 tests and/or operation demanding increased pressure;
 - e) release the pressure;
 - f) run in hole with a crushing means (32);
 - g) shatter the obturator seat (10) by using mechanical force applied by said crushing means (32).
 - 15
2. The method according to claim 1, characterized by that step b) includes dropping an obturator (12) with an elastomer coating (12a).
3. The method according to claim 1, characterized by that step b) includes
- 20 dropping an obturator (12) that is fully or partly dissolvable in well fluid.
4. The method according to claim 1, characterized by that step d) includes setting a packer (18) between the tubing (14) and the casing (16).
- 25 5. The method according to claim 1, characterized by that step d) includes performing a pressure test of the tubing (14).
6. The method according to claim 1, characterized by that step a) includes installing a well tool device (1) containing an obturator seat (10) made up of brittle
- 30 and tempered glass.
7. The method according to claim 1, characterized by that step g) includes shattering the obturator by using mechanical force applied by said crushing means.
- 35 8. The method according to claim 1, characterized by that step g) includes shattering the obturator seat (10) with a milling tool (32).

9. The method according to claim 8, characterized by that step g) includes milling the obturator (12) prior to milling the obturator seat (10).

10. A well tool device (1) comprising an first pipe part (20) and a second pipe part (22) each having a first end (20a, 22a), and a second end (20b, 22b) with a through channel (30), said well tool device (1) characterized in that a groove (24) is provided in an interface in the through channel (30) between the first pipe part (20) and the second pipe part (22), said groove (24) is accommodating a breakable obturator seat (10).

11. The device from claim 10 characterized in that the obturator seat (10) is made up of strengthened glass.

12. The device from claim 10 characterized in that the obturator seat (10) is made up of brittle and tempered glass.

13. The device from claim 10 characterized in that the obturator seat (10) is made up of several pieces of glass.

14. The device from claim 10 characterized in that the well tool device (1) comprises a spring (36) below the obturator seat (10).

15. The device from claim 10, characterized in that the well tool device (1) comprises a mechanical spring (36) below the obturator seat (10).

16. The device from claim 10, characterized in that the well tool device (1) comprises a hydraulic spring below the obturator seat (10).

17. A well tool obturator, characterized in that the obturator (12) is covered with an elastomer coating (12a).

18. The obturator according to claim 16, characterized in that the obturator (12) is made of a material that is fully or partly dissolvable in well fluid.

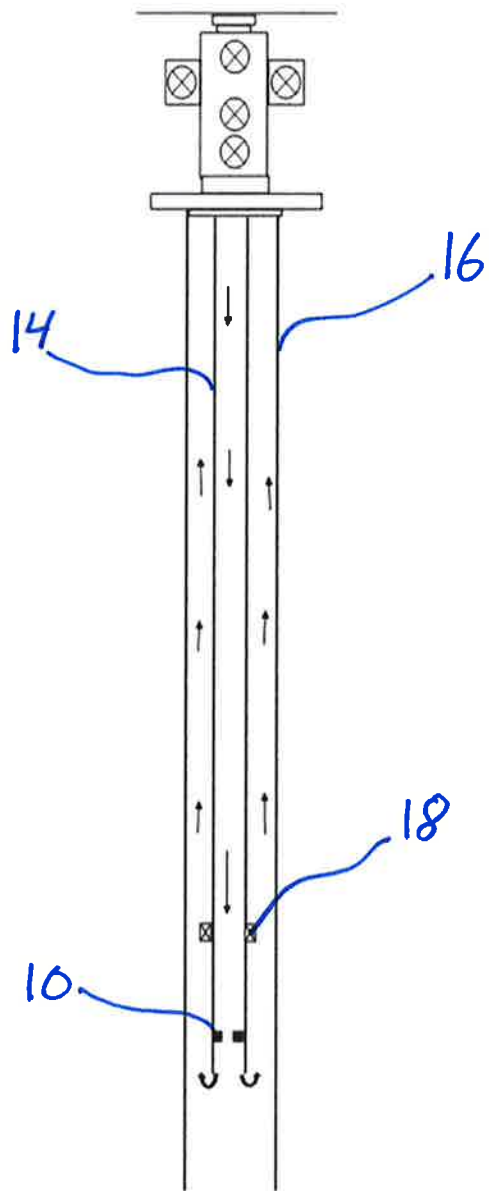


Fig. 1

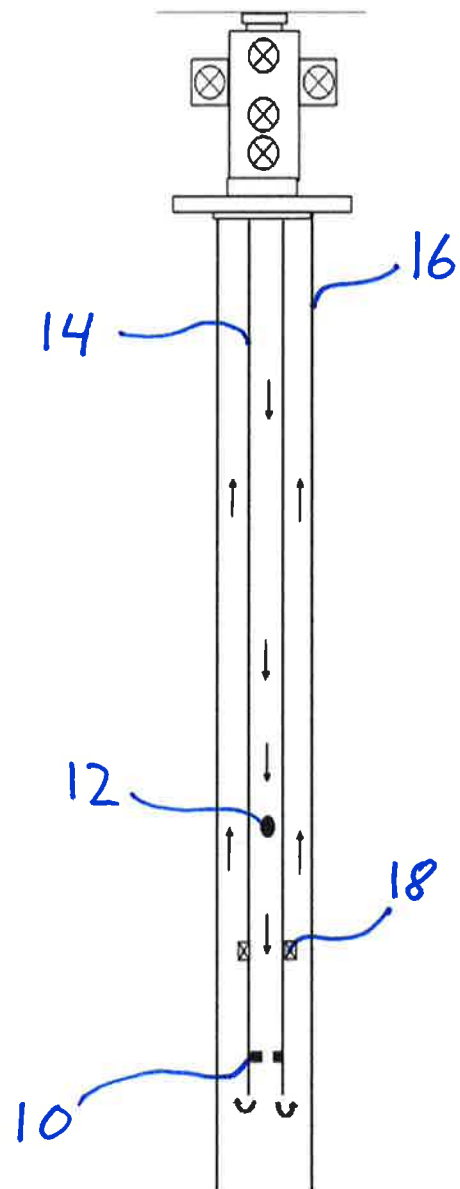


Fig. 2

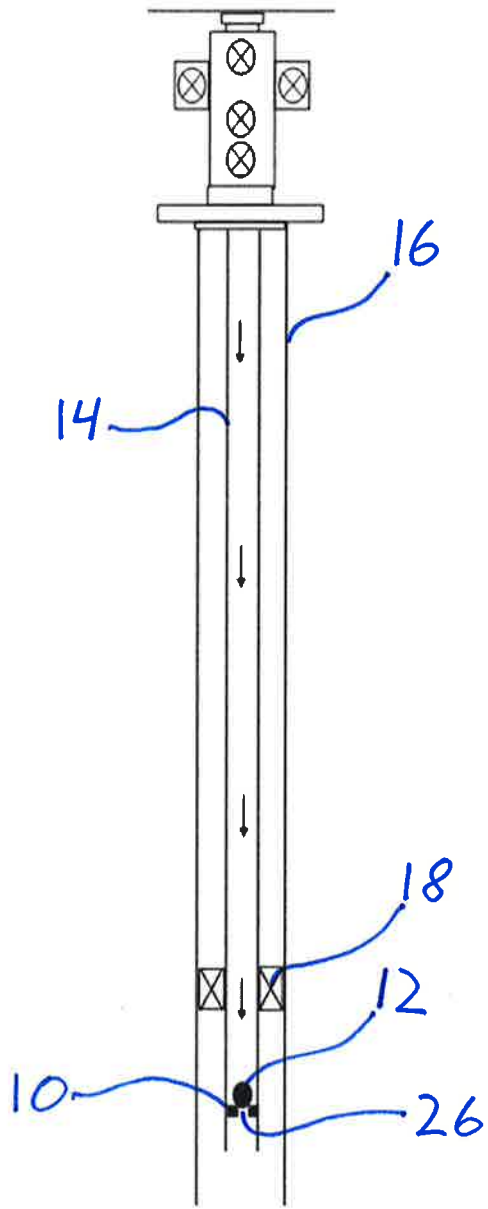


Fig. 3

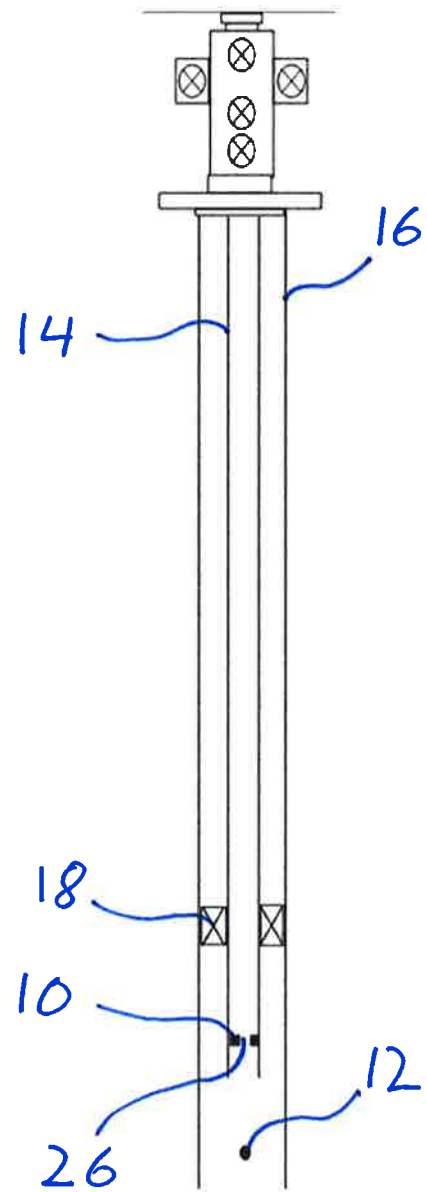


Fig. 4

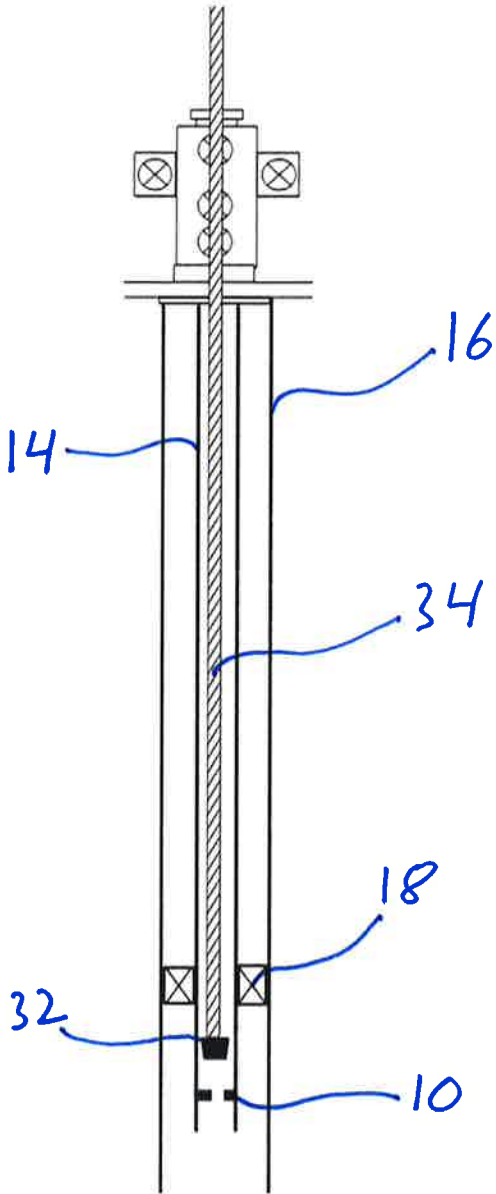


Fig. 5

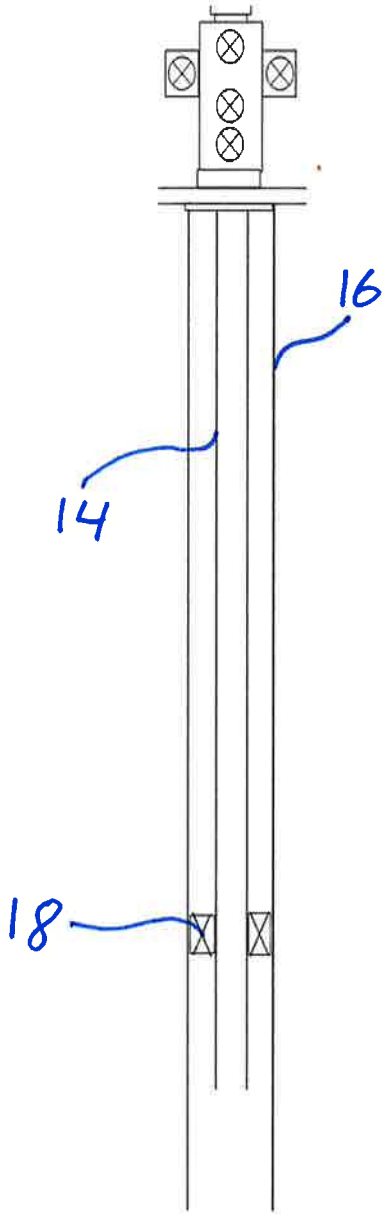


Fig. 6

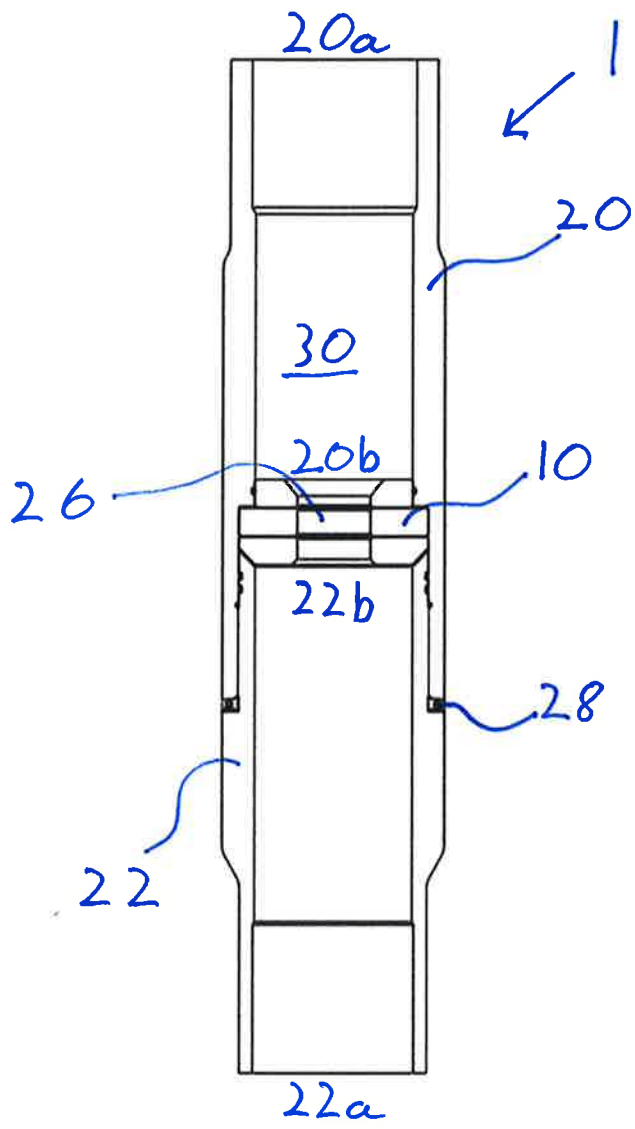


Fig. 7

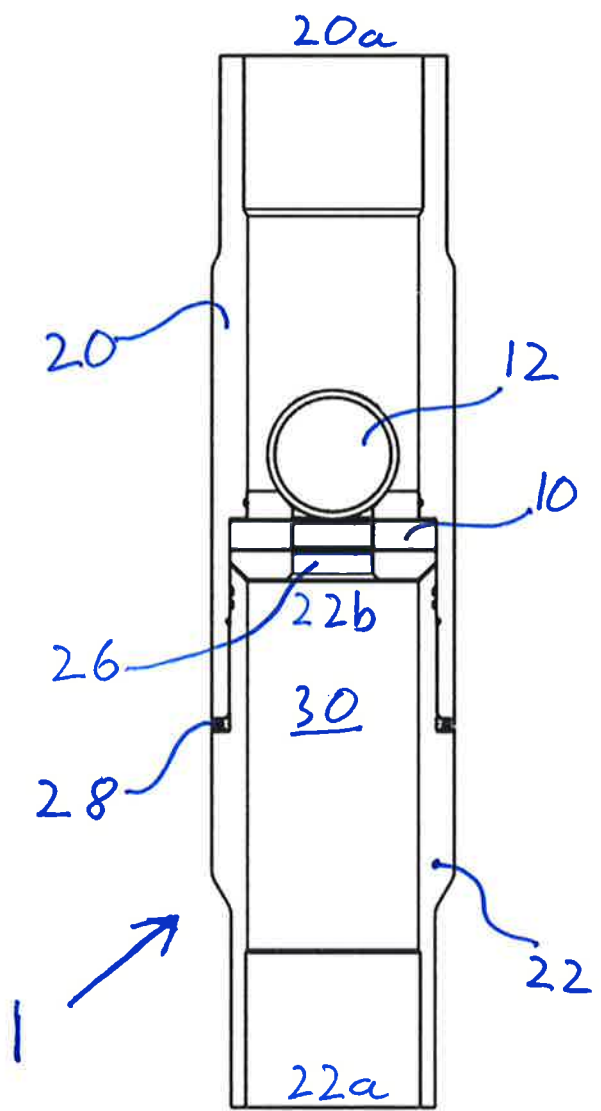


Fig. 8

