



## (12) APPLICATION

(19) NO

(21) 20160419

(13) A1

NORWAY

(51) Int Cl.

*E02B 9/08 (2006.01)*

*F03B 13/26 (2006.01)*

*F03B 13/08 (2006.01)*

*F03B 17/06 (2006.01)*


### Norwegian Industrial Property Office

(21)	Application nr	20160419	(86)	Int.application.day and application nr
(22)	Application day	2016.03.11	(85)	Entry into national phase
(24)	Date from which the industrial right has effect	2016.03.11	(30)	Priority
(41)	Available to the public	2017.09.12		
(71)	Applicant	TideTec AS, Ruseløkkveien 26, 0251 OSLO, Norge		
(72)	Inventor	Snorre K Hernæss, Haugerveien 25,, 1475 FINSTADJORDET, Norge Arne Kollandsrud, Munkerudåsen 12 D, 1165 OSLO, Norge Sai Thein Win, Wesselsgate 4, 0165 OSLO, Norge Joachim Amland, Gamle Konglungvei 10, 1392 VETTRE, Norge		
(74)	Agent of attorney	Onsagers AS, Postboks 1813 Vika, 0123 OSLO, Norge		

(54) Title **AN ENERGY GENERATING ARRANGEMENT POWERED BY TIDAL WATER AND A METHOD FOR PROVIDING SUCH AN ARRANGEMENT**

(57) Abstract

An energy generating arrangement (100) powered by tidal water, comprising a turbine (120) mounted in a fixed structure (110) which separates a first (130) and a second (140) water masses, has been disclosed. The turbine (120) is arranged to be turned within the fixed structure (110) about a substantially horizontal axis (180). The turbine (120) may be mounted in a substantially cylindrical assembly (150), and the fixed structure (110) may be provided with a substantially cylindrical cavity, configured to accommodate the cylindrical assembly (150) in such a way that the cylindrical assembly (150) may be turned within the cavity. A method for providing such an energy generating arrangement (100) has also been disclosed.

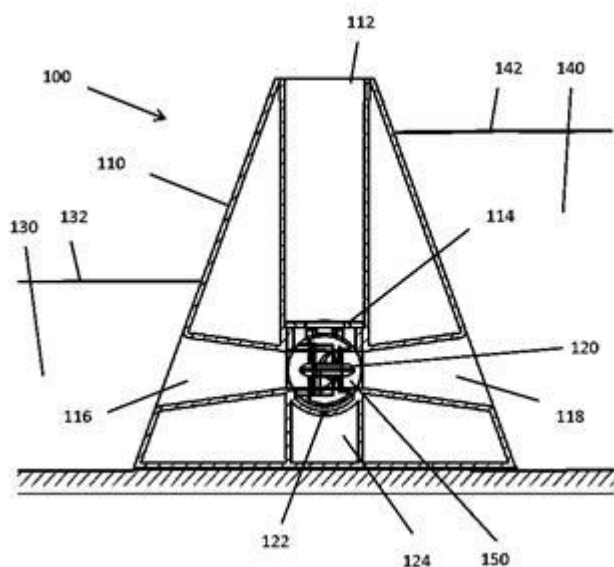

## BACKGROUND OF THE INVENTION

The global community is facing major climate changes, and one important challenge is to replace fossil fuels with renewable energy sources, such as tidal power.

5 An energy generating arrangement powered by tidal water is previously known from WO-2005/017349. This document teaches an apparatus for generating energy from a flow of water as a result of tidal forces. The apparatus comprises a turbine connected to a generator, and two water masses located on their respective side of the turbine. The turbine is arranged to be turned about a vertical axis. The position of the turbine is adjusted depending on the direction of flow prevailing at any given  
10 time between the first and the second flow space.

The previous arrangement required a complicated bearing arrangement, with larger radius and high construction cost. In addition, the bearing arrangement was placed where sediments naturally ended up, thereby causing wear on bearings, requiring more frequent service intervals.

## 15 SUMMARY OF THE INVENTION

An object of the invention is to provide an improved energy generating arrangement powered by tidal water and a method for providing such an arrangement, which may alleviate or overcome at least some of the above-mentioned disadvantages.

20 The invention has been defined in the independent claims. Advantageous embodiments and further features are set forth in the dependent claims.

## BRIEF DESCRIPTION OF THE DRAWINGS

In what follows, the invention will be described in more detail as a non-limiting example, illustrated in the appended drawings and explained in the following detailed description. Where possible, identical or corresponding elements have been  
25 indicated by means of the same reference designations in the drawings.

Figure 1 is a cross-sectional view illustrating principles of an energy generating arrangement powered by tidal water.

Figure 2 is a cross-sectional view illustrating a detail of figure 1.

Figure 3 is a cross-sectional view illustrating principles of a cylindrical assembly.

30 Figure 4 is a perspective view illustrating certain features of the cylindrical assembly.

Figure 5 is a perspective view illustrating certain features of the cylindrical assembly.

## DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

5 Figure 1 is a schematic diagram illustrating an energy generating arrangement 100 powered by tidal water.

The arrangement 100 includes a turbine 120, arranged in a fixed structure 110 which separates a first water mass 130 and a second water mass 140.

10 The fixed structure 110 may be a water barrier which wholly or partly constitutes an obstruction between a first water mass 130 on one side of a sound and a second water mass 140 on the other side of the sound. Alternatively, the fixed structure 110 may be a part of such a water barrier. In particular, the fixed structure 110 may constitute a water barrier module, and the water barrier may be constructed using a plurality of such interconnected modules.

15 An example of such a water barrier may be a barrage, lagoon or dam which essentially blocks off water across the whole cross-section of the sound, with the exception of through-flow areas in the barrier, where turbines may be arranged for harnessing the water flow.

20 However, in this document water barriers should also be understood to mean structures which only partly constitute an obstruction to flowing water. Other examples of water barriers may therefore be a breakwater, a partly submerged bridge, a flood barrier, sluices or the like. The water barrier may e.g. be located offshore or between parts of the mainland, or between a mainland area and an island, or between islands.

25 The arrangement and method disclosed herein are particularly useful in locations where the tidewater causes substantial water currents or substantial head difference from low tide to high tide, typically in narrow and shallow sounds.

30 In figure 1, the level 142 of the second water mass 140 has been illustrated to be higher than the level 132 of the first water mass 130. Under an opposite tidal condition the level of the first water mass 130 may instead be higher than the level of the second water mass 140. Hence, tidal activity leads to a change in the dominant direction of water flowing between the reservoirs or water masses, i.e., through the fixed structure 110.

35 In order to guide the water flow between the reservoirs or water masses, the fixed structure 110 is provided with a first, substantially horizontal duct 116 which extends from the first water mass 130 into a central cavity in the fixed structure, wherein the turbine 120 is arranged. Likewise, the fixed structure 110 is provided

with a second, substantially horizontal duct 118 which extends from the second water mass 140 into the central cavity in the fixed structure 110, wherein the turbine 120 is arranged.

- 5 The first duct 116 and the second duct 118 may advantageously be funnel-shaped, in such a way that each duct's cross-sectional area is wider at the outer portion of the fixed structure 110, closer to the corresponding water mass, than at the central portion of the fixed structure 110, closer to the turbine 120. The cross-section of the first and second ducts may advantageously be circular throughout the length of each duct, although other possibilities exist.
- 10 Enabling the turbine 120 to turn within the cavity of the fixed structure 110 makes it possible to use a turbine 120 that has a flow direction dependent efficiency. More specifically, it allows optimizing the turbine for one-directional flow. This will usually lead to an overall high efficiency of the energy generating arrangement 100.
- 15 Allowing the turbine 120 to turn within the fixed structure 110 makes it possible to use a mechanically simpler turbine with less need for regulation features, while still obtaining overall good efficiency. Also, the turbine 120 may be used as a pump with better efficiency in both flow directions than a fixed turbine.
- 20 The turbine 120 may include a rotor with turbine blades, a shaft connected to the rotor, which will rotate when surrounding, flowing water acts on the rotor's blades, and an electric machine driven by the rotating shaft. The electric machine may be an electric generator. "Turning the turbine", as used herein, may mean turning the entire turbine, i.e. the assembly comprising rotor, shaft and electric machine, in such a way that the rotor is positioned in a different direction with respect to the surrounding water.
- 25 Many different types of turbine types may be employed for the turbine 120. For instance, a compact turbine such as the Straflo type turbine is suitable and simple to integrate into the energy generating arrangement 100. Other suitable turbines include Kaplan bulb turbines, other types of Kaplan turbines with or without guide vanes, Straflo matrix turbines, Hydro matrix turbines, VLH turbines and more. In the present invention, as opposed to the background art disclosed in WO-2005/017349,
- 30 the turbine 120 is arranged to be turned within the fixed structure 110 about a substantially horizontal axis 180. "Substantially horizontal" includes horizontal for practical purposes, including a tolerance range of, e.g., +/- 1 degree or +/- 2 degrees.
- 35 Possible advantages of the turning of the turbine about a substantially horizontal axis may include:

The turning mechanism may be simplified, with less friction surfaces, smaller diameters for the turning shaft and less moving parts in the overall system.

Any bearings can be placed dry, out of water.

Turning the turbine about a substantially horizontal axis may facilitate easier access for maintenance, replacement and inspection of critical parts.

Other advantages may also be recognized by the skilled person, e.g. by studying the present disclosure and/or by practicing the invention.

Advantageously, the turbine 120 is mounted in a substantially cylindrical assembly or casing 150 with a substantially horizontal axis. Various aspects of the cylindrical assembly 150 have been illustrated in closer detail in figures 2, 3, 4 and 5.

The turbine type will influence size of the fixed structure, length and size of inflow and outflow duct, and size of cylindrical assembly 150. Simple turbines like VLH will not require inflow and outflow duct, and therefore a much reduces size of cylindrical assembly, only needing the shaft 160.

In some cases the cylindrical assembly 150 is not provided. For a turbine 120 that not require an inflow- and outlet duct a cylindrical assembly 150 around the turbine is not needed. In these cases the turbine 120 itself, or a fitting (plate or ring) around the turbine can be fit with an horizontal axel that the turbine turns around. The cylindrical assembly 150 may be fitted with weights to ensure a balanced center of gravity, in order to reduce the necessary force/torque to turn the cylindrical assembly 150.

The cylindrical assembly 150 may be a turret. The turbine 120 may be mounted within the cylindrical assembly 150 and locked in place by means of a locking lip 190, which is shown in closer detail in figure 5. During assembly, the turbine 120 is first mounted in the cylindrical assembly 150, then the locking lip 190 closes off the cylindrical assembly 150 and locks the turbine 120 in. This concept may also provide a disassembly possibility, for instance in case of a turbine exchange, due to service, malfunction or failure.

The cylindrical assembly 150 may be provided with one or more manholes to give a human access to the inner part of the construction. Such a manhole may e.g. be provided through the shaft 160, which may be pipe-shaped for i.a. this purpose.

The cylindrical assembly 150 may be manufactured by use of various types of materials, e.g. metal, such as steel, concrete, or fiberglass.

The cylindrical assembly 150 and the locking lip 190 may be manufactured by use of various types of materials, e.g., metal, such as steel, and fiberglass.

The arrangement of the turbine 120 within a cylindrical assembly 150, e.g., a turret, may have several advantages:

5 The enclosure of the whole turbine in the cylindrical assembly 150, such as the turret, makes it possible to shape the inlet and outlet of the cylindrical assembly 150 asymmetrically. This may have the effect of increasing overall efficiency in generating mode.

Advantageously, the fixed structure 110 is provided with a substantially cylindrical cavity which is configured to accommodate the cylindrical assembly 150 in such a way that the cylindrical assembly 150 may be turned within the cavity.

10 The fixed structure 110 may be manufactured by use of various types of materials, e.g., concrete, metal, such as steel, and fiberglass.

15 The cylindrical assembly 150 may be orientated in a configuration such that parts or itself in its entirety may be removed from the fixed structure 110 or installed into the fixed structure by lifting. Lifting may be done by the help of buoyancy in the cylindrical assembly 150 so that no, or less, mechanical force is needed. Parts that can be removed are the cylindrical assembly 150, the turbine 120 or the locking lip 190. To this end, the cylindrical assembly 150 may be provided with one or more watertight cavities, arranged and dimensioned in order to adjust the buoyancy of the cylindrical assembly.

20 The fixed structure 110 may be provided with a vertical duct 112 which extends from the top of the fixed structure down to the cylindrical cavity that is provided for accommodating the cylindrical assembly 150. The vertical duct 112 may be provided on its inside with tracks that may guide the cylindrical assembly 150, and/or its shaft 160, into the correct position during installation. These tracks may also  
25 facilitate lift out during disassembly.

The fixed structure 110, in particular a lower portion of the cavity configured to accommodate the cylindrical assembly 150, may be provided with a gap 122 for collection of sediments during operation. At the bottom of this gap 122 there may be a drain hole that can be opened for easy drainage of sediments into a lower  
30 compartment 124 of the fixed structure 110.

The fixed structure 110 may be provided with a lip to enclose the space between the first 116 and second 118 ducts and the cylindrical assembly 150 comprising the turbine 120.

35 The fixed structure 110 may also comprise another lip that enables scraping of the outside wall of the cylindrical assembly 150.

The cylindrical assembly 150 may comprise another lip that enables scraping of the inside wall of the fixed structure 110.

The fixed structure 110 may be provided with access areas providing access to the turbine 120 from the top and from the sides of the cylindrical assembly 150.

- 5      The cylindrical assembly 150 may include a shaft 160 along its rotational axis 180, particularly shown in figures 4 and 5. The shaft 160 may not necessarily pass through the cylindrical assembly, instead it may e.g. be formed by flanges mounted on each of the two base areas of the cylindrical assembly 150.

- 10      The shaft 160 may advantageously be supported on the fixed structure 110, in particular by means of bearings arranged between the shaft 160 and the fixed structure 110.

The shaft 160 may be hollow to comprise electrical/hydraulically equipment and cabling to the generator and turbine. The shaft 160 may also be used as an access to the inner part of the cylindrical assembly 150.

- 15      The shaft 160 may be turned during construction of the energy generating arrangement 100.

The shaft 160 may comprise a gear that is connected to the driving device 170. When appropriate, the shaft 160 may comprise a fitting to hydraulic pumps for the driving device 170.

- 20      The shaft 160 may be manufactured by the use of metal, e.g. steel, or fiberglass.

The friction area where the shaft is in interaction with the bearing may be of a hard metal or a self-lubricating material (e.g. Bronze graphite).

Each bearing may take forces in both horizontal and vertical direction. The bearings may be manufactured of a polymer or self-lubricating metal.

- 25      The bearings may seal between the fixed structure 110 and the cylindrical assembly 150. The bearings may support the cylindrical assembly 150 and are able to withstand significant vibration.

- 30      The energy generating arrangement 100 may further comprise a driving device 170 for turning the cylindrical assembly 150 within the fixed structure 110. An example of a driving device 170 has been illustrated in figure 4.

The driving device 170 may comprise an electrical motor with a rotating shaft connected to a gear or transmission device, powered by an electric power supply. Alternatively, the driving device 170 may comprise linked hydraulic pistons that

are connected to a periphery of the shaft 160, powered by a hydraulic power supply, i.e., hydraulic fluid under pressure.

The driving device 170 may include a chain drive connected between the shaft 160 and the motor, the motor being attached to the fixed structure.

- 5      Advantageously, the energy generating arrangement 100 may further comprise a control device for controlling the driving device. The control device may be configured to control the driving device to turn the cylindrical assembly 150, and thus the turbine 120, in both directions, or in one direction only.

- 10      The control device may e.g. be configured to turn the cylindrical assembly 150 by an angle of 90, 180, 270 and 360 degrees, in one or both directions. Regular operating positions of the cylindrical assembly includes 0 degrees and 180 degrees, which both correspond to horizontal positions of the turbine 120. Free movement beyond these regular operating positions or angles may i.a. facilitate access to all sides of the turbine during maintenance.

- 15      The cylindrical assembly 150 may advantageously have a “locked mode” in the regular operating positions or angles (0 and 180 degrees), in particular when the turbine is operating. In this mode the cylindrical assembly 150 may be locked with pins, brakes or by other suitable locking means.

- 20      The control device may advantageously be configured to turn (180 degrees) the cylindrical assembly 150 four times per 24 hours, following tidal cycles, during normal operation. Alternatively, the control device may be configured to turn the cylindrical assembly 150 another number of times per 24 hours, in particular more than four times, or the control device may be configured to turn the cylindrical assembly 150 sporadic or on demand.

- 25      The control device may advantageously be configured to turning the cylindrical assembly 150 90 degrees, 270 degrees or 360 degrees if needed, with the purpose of maintenance and/or for access, and/or for removal of sediments around the cylindrical assembly 150.

- 30      The invention also relates to a method for providing the energy generating arrangement 100 powered by tidal water as disclosed above. The method comprises the steps of:

mounting a turbine 120 in a fixed structure 110 which separates a first 130 and a second 140 water masses, and

- 35      arranging the turbine 120 to be turned within the fixed structure 110 about a substantially horizontal axis 180.



The fixed structure 110 may be of a type as disclosed above with reference to figures 1-5. The fixed structure 110 may, e.g. be provided as a plurality of pre-assembled water barrier modules, which are interconnected during deployment, i.e. when assembled between the first 130 and second 140 water masses. The fixed structure, which may include the plurality of water barrier modules, may be positioned on a supporting base, which may e.g. be a sea bottom, or advantageously a fundament that has been provided on the sea bottom.

The step of mounting of the turbine 120 in the fixed structure 110 may include mounting the turbine 120 in a cylindrical assembly 150, locking the turbine in place by means of, e.g., a locking lip 190, and arranging the cylindrical assembly 150 with the turbine 120 within a central cavity in the fixed structure.



The cylindrical assembly 150 with the turbine 120 and the locking lip 190 may then be lowered into a vertical duct 112 which extends from the top of the fixed structure 110 down to the central cylindrical cavity in the fixed structure 110. This lowering may be facilitated by means of tracks provided on the inside of the vertical duct 112.

The turbine may also work as a pump. In this operation mode the electric machine in the turbine may be operating as an electric motor. The turbine, working as a pump, may have a better efficiency in both directions than a conventional one-way turbine used as a pump. A one way turbine working like a pump needs to operate in both reverse pumping mode and forward pumping mode to be able to operate in both directions, the efficiency of these two operating modes is by nature different, due to shape of blades, guide vanes and shape of inner wall between turbine and fixed structure. For this invention the turbine only needs to operate in one of these modes, reverse pumping or forward pumping, and one turns the cylindrical assembly to ensure the optimum pumping efficiency in both directions.



## CLAIMS


1. An energy generating arrangement (100) powered by tidal water, comprising a turbine (120) mounted in a fixed structure (110) which separates a first (130) and a second (140) water masses,
- 5 the turbine (120) being arranged to be turned within the fixed structure (110) about a substantially horizontal axis (180).
2. Arrangement according to claim 1, wherein the turbine (120) has a flow direction dependent efficiency.
3. Arrangement according to claim 1 or 2,
- 10 wherein the turbine (120) is mounted in a substantially cylindrical assembly (150) with a substantially horizontal axis (180).
4. Arrangement according to claim 3, wherein the fixed structure (110) is provided with a substantially cylindrical cavity, configured to accomodate the cylindrical assembly (150) in such a way that the
- 15 cylindrical assembly (150) may be turned within the cavity.
5. Arrangement according to claim 3 or 4, wherein the cylindrical assembly (150) includes a shaft (160).
6. Arrangement according to claim 5, wherein the shaft is supported on the fixed structure.
- 20 7. Arrangement according to claim 6, wherein the support includes bearings.
8. Arrangement according to one of the claims 1-7, further comprising a driving device (170) for turning the cylindrical assembly (150) within the fixed structure (110).
- 25 9. Arrangement according to claim 8, further comprising a control device for controlling the driving device.
10. Arrangement according to one of the claims 1-9, wherein the fixed structure (110) is provided with a first duct (116) which extends from the first water mass (130) into a central cavity in the fixed structure (110), and
- 30 a second duct (118) which extends from the second water mass (140) into the central cavity in the fixed structure (110), the turbine 120 being arranged within the central cavity in the fixed structure (110).

11. Arrangement according to claim 10,  
wherein the first (116) and second (118) ducts are funnel-shaped, with a cross-sectional area that is wider at an outer portion of the fixed structure (110) than at the central portion of the fixed structure (110).
- 5 12. Arrangement according to one of the claims 10-11,  
wherein the fixed structure (110) is provided with a vertical duct (112) which extends from the top of the fixed structure (110) down to the cylindrical cavity in the fixed structure (110).
- 10 13. Arrangement according to claim 12,  
wherein the vertical duct (112) is provided with an arrangement for guiding the cylindrical assembly (150) and/or its shaft (160) during assembly or disassembly.
14. Arrangement according to one of the claims 10-13,  
wherein a lower portion of the central cavity in the fixed structure (110) is provided with a gap (122) with a drain hole at its bottom, allowing drainage of sediments into  
15 a lower compartment (124) of the fixed structure (110).
15. A method for providing an energy generating arrangement (100) powered by tidal water, the method comprising the steps of:
- mounting a turbine (120) in a fixed structure (110) which separates a first (130) and a second (140) water masses, and
- 20 arranging the turbine (120) to be turned within the fixed structure (110) about a substantially horizontal axis (180).

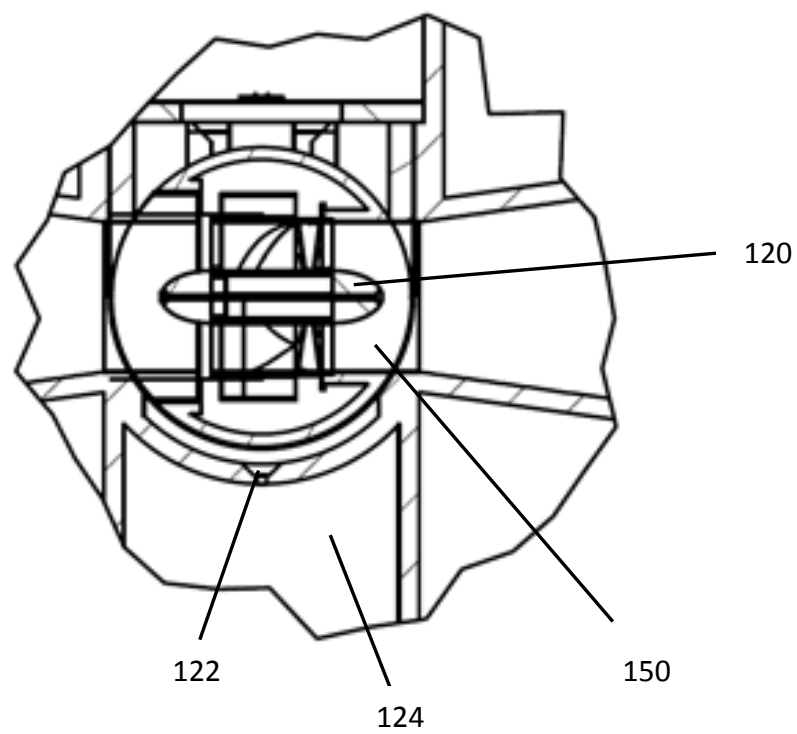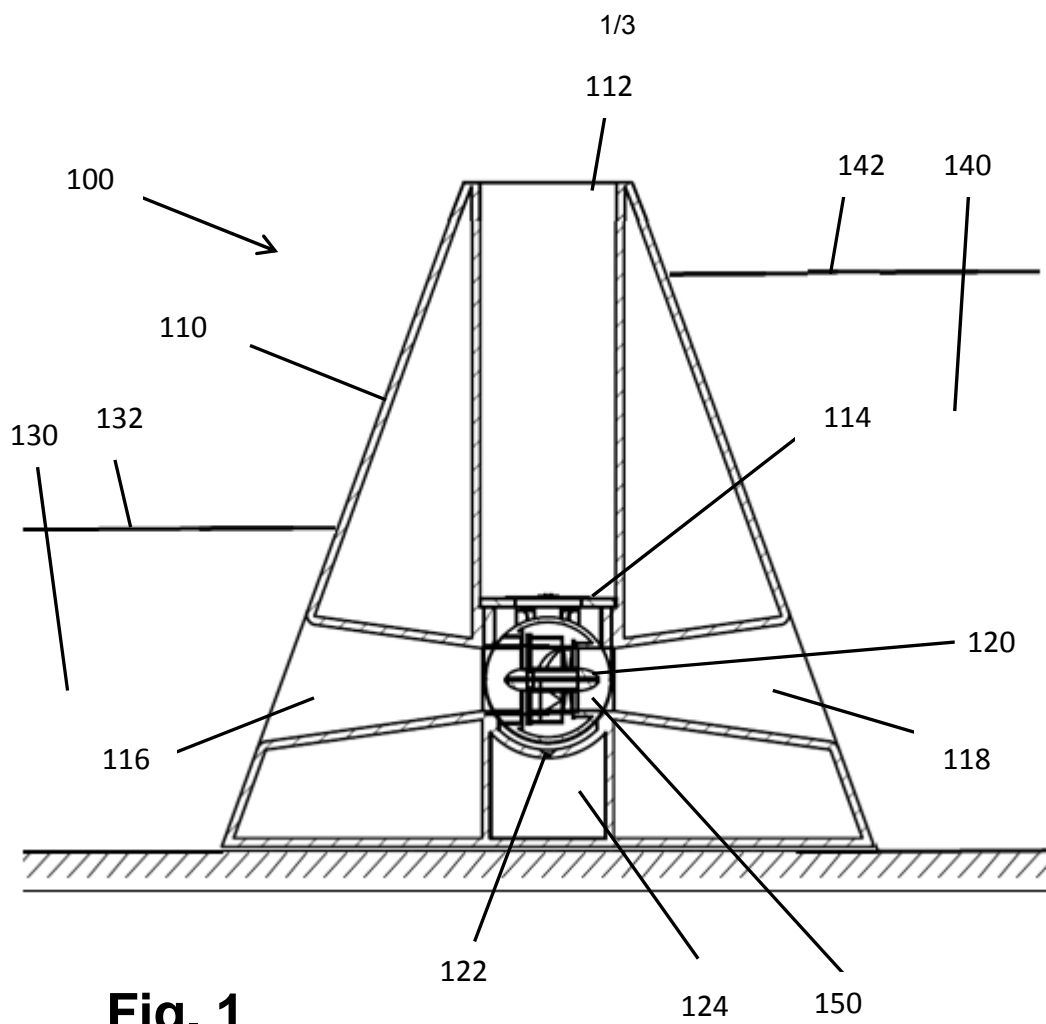

**Fig. 2**

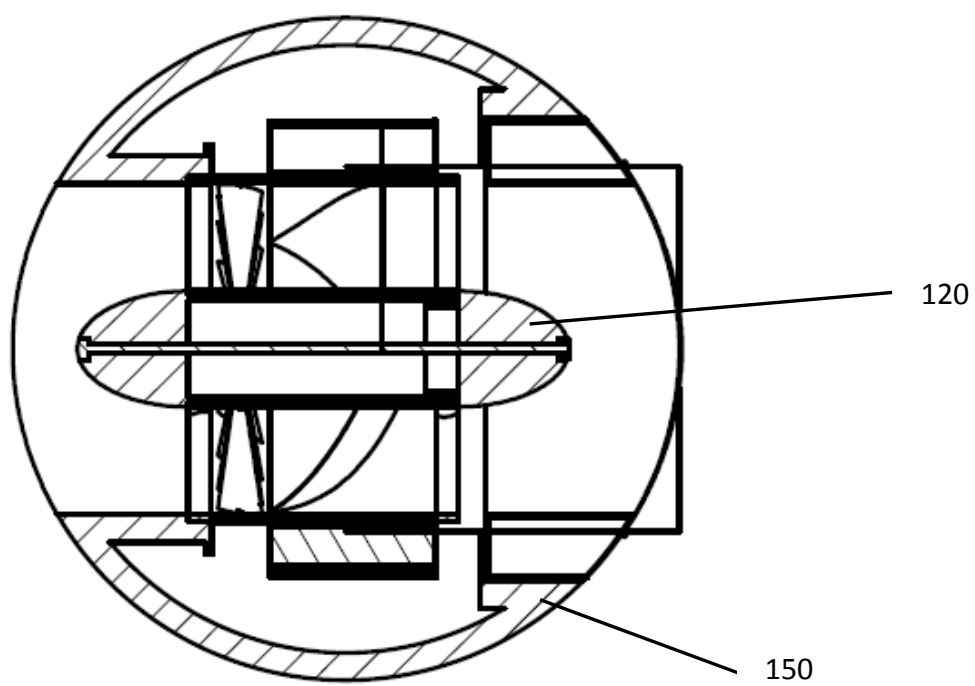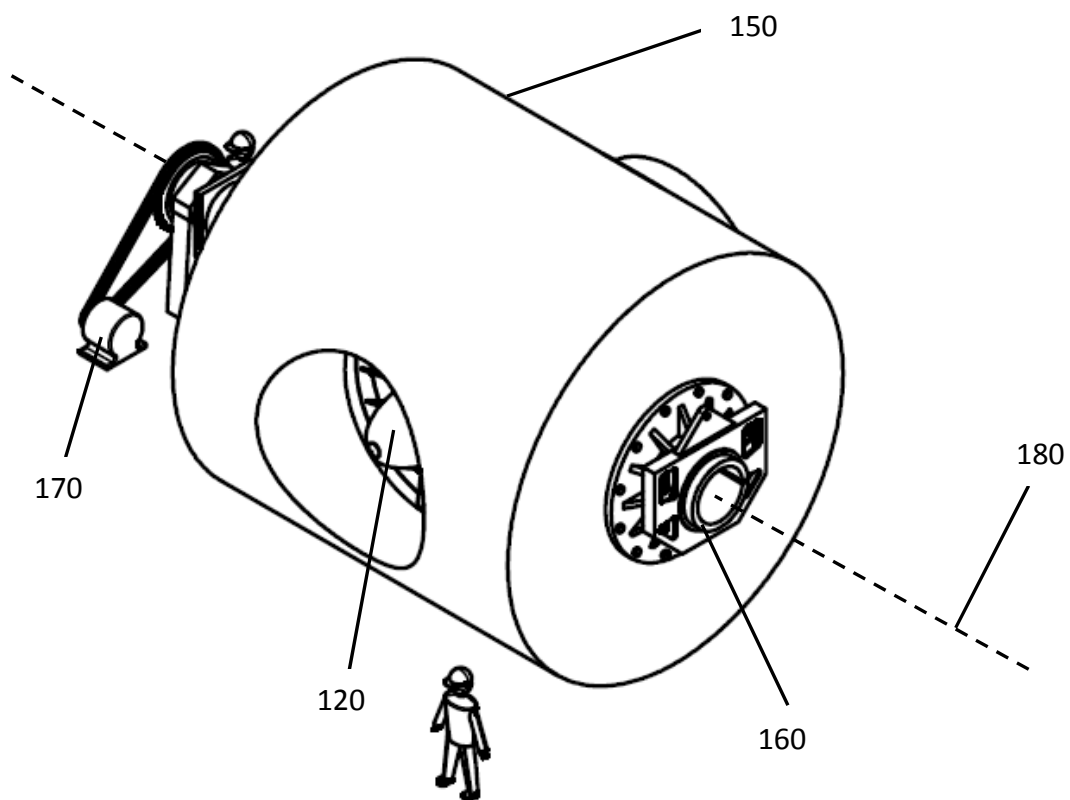**Fig. 3****Fig. 4**

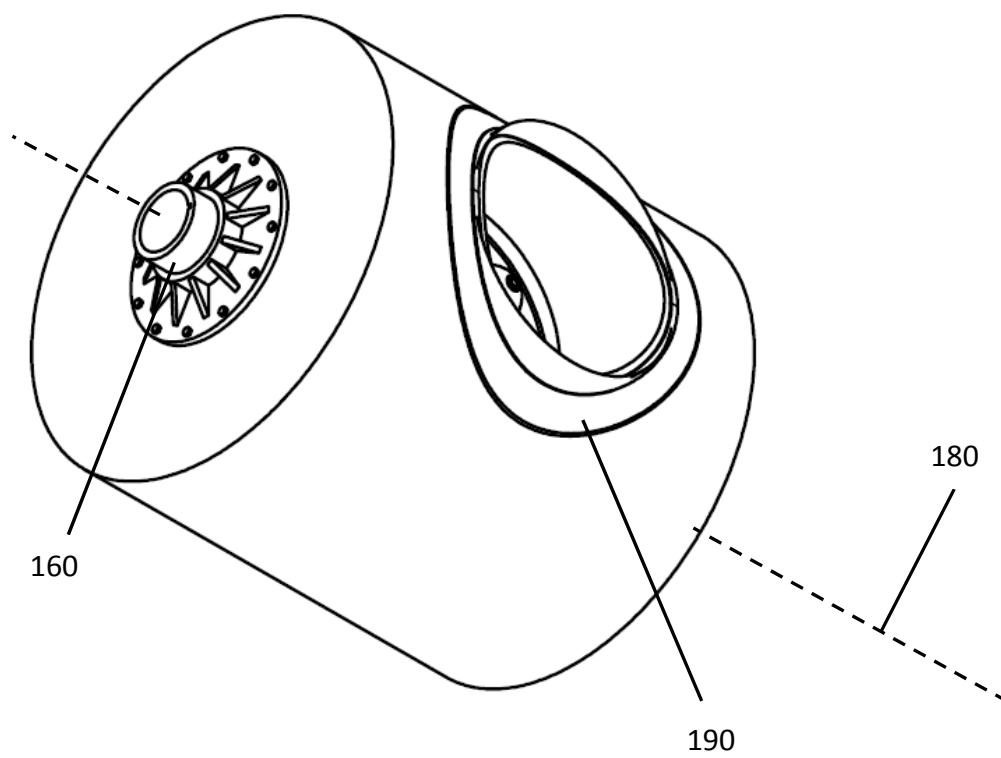**Fig. 5**